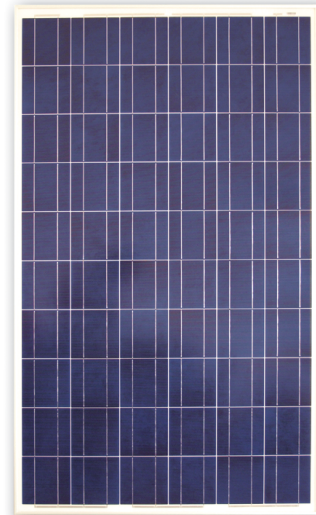
**Link to the Sun!**www.sunlink-pv.cn

240W Maximum Power Poly-Crystalline Solar Module

Benefits

- High and stable conversion efficiency based on over 5 years professional experience
- High reliability with guaranteed +/-2% output power tolerance
- Proven materials,tempered front glass,and a sturdy anodized aluminum frame allow modules to operate reliably in multiple mountily configuration
- Combination of high efficiency and attractive appearance



Quality and Safety

- 25-year output power warranty
- ISO9001:2000 (Quality Management System) certified factory
- IEC61215,Safety tested IEC61730 , CE.
- Product Quality Warranty & Product Liability Insurance guarantee end users' benefit



SunLink PV Co.,Ltd

Zhangjiagang Economic Development Zone,
Zhangjiagang City,Jiangsu Province,
215600, China.

Tel:+86-512-58992216

Tel:+86-512-58262253

Fax:+86-512-58262258

www.sunlink-pv.cn





Link to the Sun!

www.sunlink-pv.cn

Temperature Coefficients

NOCT	45 +/-2°C
Voltage temperature coefficient(Voc)	-0.36%/°C
Current temperature coefficient(Isc)	+0.033%/°C
Power temperature coefficient(Pmpp)	-0.48%/°C
Minimum power tolerance	+/-2%

NOCT:Nominal Operating cell Temperature:-40°C to +85°C

Mechanical Data

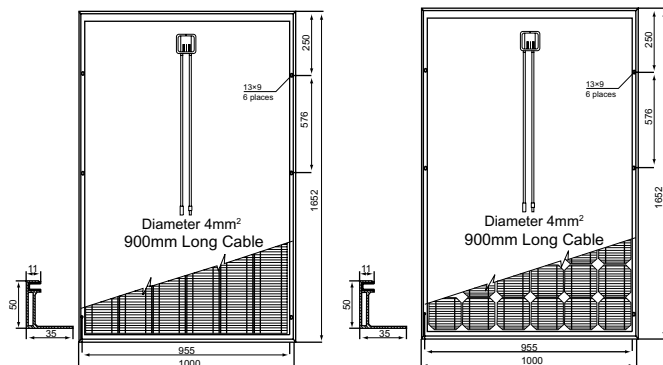
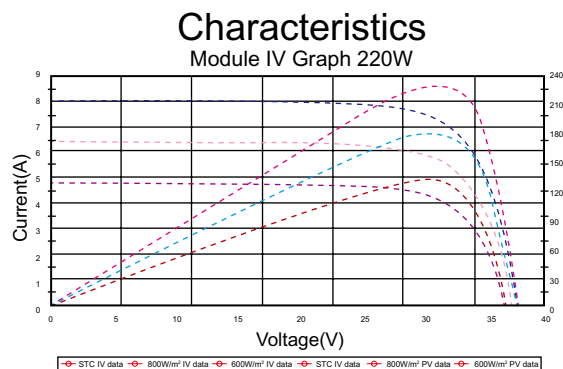
Solar Cell	60 Poly-crystalline 156 × 156mm
Front Glass	3.2mm tempered
Junction Box	IP65 or IP67 rated (Aluminium)
Output Cables	900mm length cable/compliable with MC IV connectors
Frame	Anodized aluminium
Weight	20kg
Dimension	1652×1000×50mm

Warranty and Certifications


Warranty	5 years workmanship, 10 years 90%, 25 years 80% power warranty
Certifications	IEC61215, Safety tested IEC61730, CE

Electrical Data

Module Type	SL 220-20P	SL 220-20P	SL 220-20P
Nominal peak power(Wp)	220W	230W	240W
Nominal voltage(Vmp)	29.2V	29.5V	29.8V
Nominal current(Imp)	7.53A	7.80A	8.05A
Open circuit voltage(Voc)	36.8V	37.2V	37.4V
Short circuit current(Isc)	8.30A	8.46A	8.67A
Module efficiency	13.3%	13.9%	14.5%
Operating Temperatere	-40 to +85°C	-40 to +85°C	-40 to +85°C
Maximum System Voltage	1000V DC	1000V DC	1000V DC

 STC:1000W/m²,25°C,AM=1.5

CAUTION:Read Safety And Installation.Instructions Before Using The Product. Go to www.sunlink-pv.cn

© October 2009 SunLink PV Co.,Ltd. All rights reserved. Sepcifications included in this datasheet are subject to change without notice

 Printed on recycled paper.